

# Piezo Shower Control SLS 01PA




## Characteristics



- hygienic flush
- vandal-proof
- suitable for a prison
- special vandal-proof stainless steel cover, thickness 3 mm, safety screws
- is destined for cold or premixed water
- water flows after soft push of the piezo button
- water stops flowing after adjustable flowing time (can be set in 10 s - 310 s), standard 120 s
- water could be stopped by follow-up soft push of piezo button
- monitoring of battery capacity (for models with index B)
- parameter adjustment using by the remote control SLD 04

## Installation Drawing

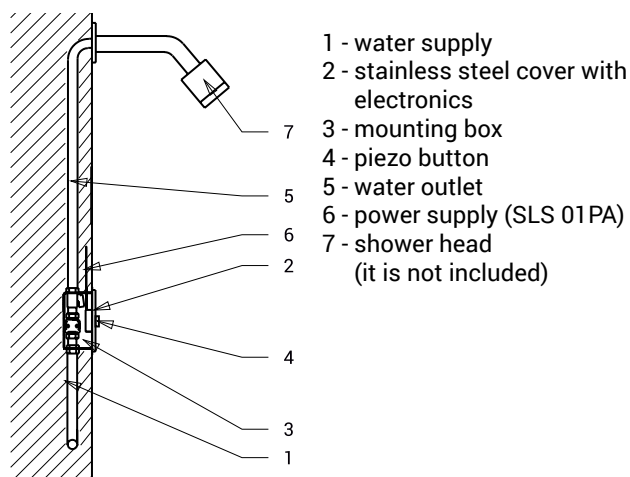

## Technical Specification

<b>Stainless steel cover dimension</b>	160 x 170 x 3 mm
<b>Mounting box dimension</b>	140 x 140 x 75 mm
<b>Operating voltage</b>	
▪ SLS 01PA	24 V DC
▪ SLS 01PBA	6 V
<b>Power input</b>	
▪ operating by 24 V DC	7 W
▪ by operating 6 V	3 W
<b>Battery life</b>	
▪ 4 pcs. AA alkaline batteries	approx. 2 years
AA, 1,5 V, 2700 mAh	(100 uses per day)
<b>Recommended flow pressure</b>	0,1 - 0,6 MPa
<b>Rate of flow</b>	12 l/min. (inf. data)
<b>Water inlet</b>	male thread G 3/4"
<b>Water outlet</b>	male thread G 3/4"

## Supply Specification

<b>SLS 01PA - Supply No. 12016</b>	stainless steel cover with electronics, plastic mounting box with brass screw coupling,
<b>SLS 01PBA - Supply No. 12018</b>	electromagnetic valve and ball valve, 4x torx screw, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLS 01PBA)

## Recommended Accessories

<b>SLZ 01Y - Supply No. 05012</b>	power supply 24 V DC for operating of max. 5 pcs. of showers
<b>SLZ 01Z - Supply No. 05011</b>	power supply 24 V DC for operating of max. 9 pcs. of showers
<b>SLZ 04Y - Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
<b>SLZ 04Z - Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
<b>SLZ 04X - Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
<b>SLZ 06 - Supply No. 05060</b>	power supply 24 V DC for operating of max. 1 pc. of shower
<b>SLD 04 - Supply No. 07040</b>	remote control for an adjustment of parameters
<b>SLT 04 - Supply No. 09040</b>	thermostatic valve 3/4", rate of flow 28 l/min by the pressure 0,1 MPa
<b>SLT 05 - Supply No. 09050</b>	thermostatic valve 1/2", rate of flow 42 l/min by the pressure 0,1 MPa
<b>SLT 07 - Supply No. 09070</b>	thermostatic valve 3/4", rate of flow 43 l/min by the pressure 0,1 MPa
<b>SLT 08 - Supply No. 09080</b>	thermostatic valve 1", rate of flow 53 l/min by the pressure 0,1 MPa
<b>SLT 09 - Supply No. 09090</b>	thermostatic valve 5/4", rate of flow 82 l/min by the pressure 0,1 MPa
<b>SLT 10 - Supply No. 09100</b>	thermostatic valve 6/4", rate of flow 155 l/min by the pressure 0,1 MPa
<b>SLA 03 - Supply No. 06030</b>	vandal-proof shower head with possibility to set an angle of water flow
<b>SLA 13 - Supply No. 06130</b>	vandal-proof shower head with possibility to set an angle of water flow
<b>SLA 14 - Supply No. 06140</b>	vandal-proof shower head
<b>SLA 39 - Supply No. 06390</b>	vandal-proof shower head
<b>SLA 40 - Supply No. 06400</b>	vandal-proof shower head with possibility to set an angle of water flow
<b>SLA 36 - Supply No. 06360</b>	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)