


# Radar Flushing Unit for Urinal FORTY 3 (Globo) F0029.BI SLP 99



## Characteristics



- DESIGNED FOR URINAL FORTY 3 (Globo) F0029.BI
- includes Bluetooth control (Sanela Control app available for download)
- THE URINAL DOES NOT HAVE TO BE SENT FOR ASSEMBLY (THE RADAR SENSOR IS SUPPLIED SEPARATELY)
- SLP 99S - 24 V DC, pre-wall mounting (water supply with flexi hoses)
- SLP 99Z - 230 V AC, including power supply unit
- SLP 99B - 6 V, including housing with 4 pc AA batteries
- economy flushing by 1 liter of water
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal (it analyses changes, which are proceeded inside of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics via the Sanela Control app (Bluetooth) or the SLD 04 remote control (acoustic indication of setting) without dismantling the urinal
- automatic flushing after each 6 hours non-use
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after each flushing

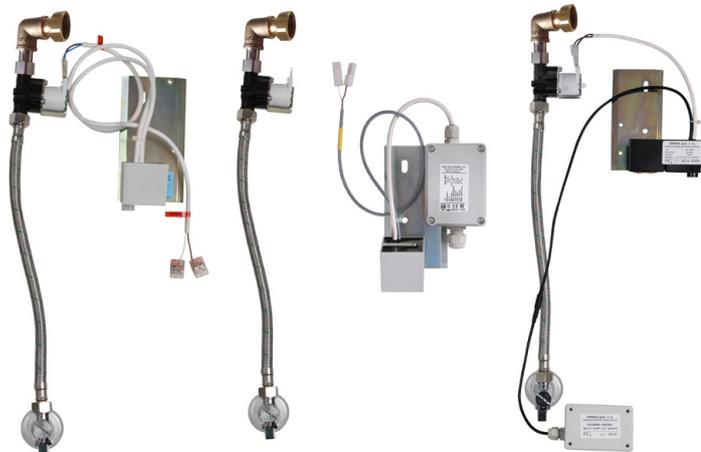


SLP 99S

SLP 99Z

SLP 99B

## Installation Drawing

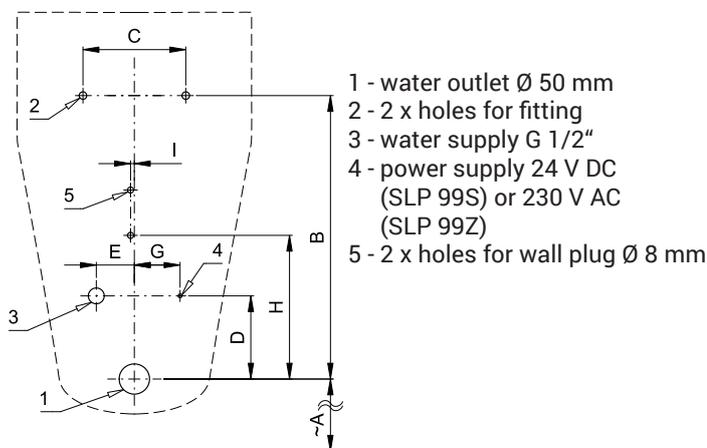

Dimensions (mm)	A	B	C	D	E	G	H	L
SLP 99 - FORTY 3	445	375	135	110	50	60	190	5

\* for the height of the front edge of the urinal 650 mm above the floor

## Technical Specification

### Operating voltage

- SLP 99S 24 V DC
- SLP 99Z 230 V AC/50 Hz
- SLP 99B 6 V

### Power input

- operating by 24 V DC 8 W
- operating by 6 V 3 W

### Recommended flow pressure

- 0,1 - 0,6 MPa

### Rate of flow

- 18 l/min (inf. data)

### Water inlet

- male thread G 1/2"

### Water outlet

- female thread G 1/2"

Illustrative photo:



SLA 11



SLA 11A



SLA 11B



SLA 11C

## Supply Specification

- SLP 99S - Supply No. 21992 radar flushing unit including Bluetooth module on the mounting rail, electromagnetic valve, connecting hoses, angle valve, siphon, power supply (SLP 99Z),
- SLP 99Z - Supply No. 21994
- SLP 99B - Supply No. 21996 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh with battery case (SLP 99B)

## Recommended Accessories

<b>SLZ 01Y</b>	- <b>Supply No. 05012</b>	power supply 24 V DC for operating of max. 5 pcs. of flushing units
<b>SLZ 01Z</b>	- <b>Supply No. 05011</b>	power supply 24 V DC for operating of max. 9 pcs. of flushing units
<b>SLZ 04Y</b>	- <b>Supply No. 05042</b>	power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
<b>SLZ 04Z</b>	- <b>Supply No. 05041</b>	power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
<b>SLZ 04X</b>	- <b>Supply No. 10049</b>	power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
<b>SLZ 06</b>	- <b>Supply No. 05060</b>	power supply 24 V DC for operating of max. 1 pc. of flushing unit
<b>SLD 04</b>	- <b>Supply No. 07040</b>	remote control for an adjustment of parameters
<b>SLA 11</b>	- <b>Supply No. 06110</b>	deodorising urinal screen - orange colour, mango scent
<b>SLA 11A</b>	- <b>Supply No. 06111</b>	deodorising urinal screen - red colour, kiwi and grapefruit scent
<b>SLA 11B</b>	- <b>Supply No. 06112</b>	deodorising urinal screen - transparent colour, honeysuckle scent
<b>SLA 11C</b>	- <b>Supply No. 06113</b>	deodorising urinal screen - blue colour, cotton bloom scent
<b>SLR 09</b>	- <b>Supply No. 08090</b>	mounting frame for ceramic urinals with built-in flush or for ceramic washbasins
<b>SLA 36</b>	- <b>Supply No. 06360</b>	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)
<b>SANELA CONTROL APP</b>		available for download on the App Store and Play Store