

# Coin and Token Shower Timers for Four to Twelve Showers

## SLZA 02KM




### Characteristics



- hygienic flush
- vandal-proof
- choice of shower by the user in the menu
  - the user selects the shower number with a button (displayed on the screen), inserts coins or a token, and confirms the selected shower number with the button
- direct control
  - after inserting a coin or a token the device starts water flow on several seconds to indicate the chosen shower
  - after set delay the device starts water flow for paid time
  - 30 s before the end of water supply the user is warned by interrupting of water flow
  - the device adds up the coins but does not return
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value, display contrast, possibility switch off some from showers)
- marking of the buttons by symbols could be made to order
- the possibility of obtaining the statistical information, device diagnostics
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

### Installation Drawing

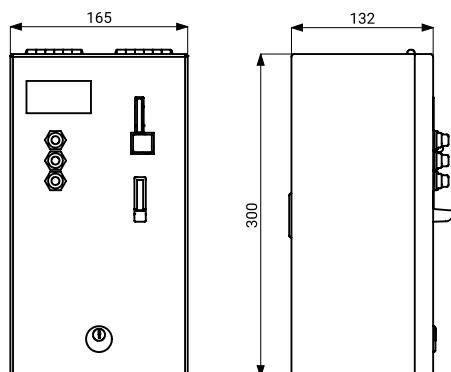

### Technical Specification

Dimensions	300 x 165 x 132 mm
Weight	4,5 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	91 W (depends on the accessories and the number of showers)
Accepted coins	1 and 2 €, token (other currencies on request)
Switch on delay	0 - 255 sec., standard 30 sec.
Showering time	5 - 1200 sec.

## Supply Specification

SLZA 02KM - Supply No. 89021 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)

## Required Accessories



**SLZA 15A**

**88151**

Distributor of solenoid valves and contactors



**SLZA 20**

**88200**

Shower control without piezo button  
- premixed water



**SLZA 20H**

**88205**

Shower control without piezo button  
- for cold and hot water, temperature regulated  
by mixer



**SLZA 20TA**

**88201**

Shower control without piezo button  
- for cold and hot water, temperature regulated  
by thermostatic mixer



**SLZA 21**

**88210**

Stainless steel shower panel without piezo  
button - premixed water



**SLZA 21H**

**88215**

Stainless steel shower panel without piezo  
button - for cold and hot water, temperature  
regulated by mixer



<b>SLZA 21T</b>	<b>88216</b>	Stainless steel shower panel without piezo button - for cold and hot water, temperature regulated by thermostatic mixer
-----------------	--------------	---

## Recommended Accessories

<b>SLZ 01Y</b>	- <a href="#">Supply No. 05012</a>	power supply 24 V DC for operating of max. 5 pcs. of showers
<b>SLZ 01Z</b>	- <a href="#">Supply No. 05011</a>	power supply 24 V DC for operating of max. 9 pcs. of showers
<b>SLZ 04Y</b>	- <a href="#">Supply No. 05042</a>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
<b>SLZ 04Z</b>	- <a href="#">Supply No. 05041</a>	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
<b>SLZ 04X</b>	- <a href="#">Supply No. 10049</a>	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
<b>SLD 05</b>	- <a href="#">Supply No. 07050</a>	remote control for an adjustment of parameters
<b>SLA 03</b>	- <a href="#">Supply No. 06030</a>	vandal-proof shower head
<b>SLA 39</b>	- <a href="#">Supply No. 06390</a>	vandal-proof shower head
<b>SLA 40</b>	- <a href="#">Supply No. 06400</a>	vandal-proof shower head with possibility to set an angle of water flow
<b>SLZA 50</b>	- <a href="#">Supply No. 88500</a>	set of 50 pcs. of tokens for coin device